


Product family overview

- Two-way communication
- Sensors with an IO-Link interface can send data& status and receive parameters to the controller through the IO-Link Master, making it easier to save and modify parameters, which make it easy sensor replacement and quick parameters modification



- Efficient wiring with standardized cables
- Power supply and signals are routed through the same cable

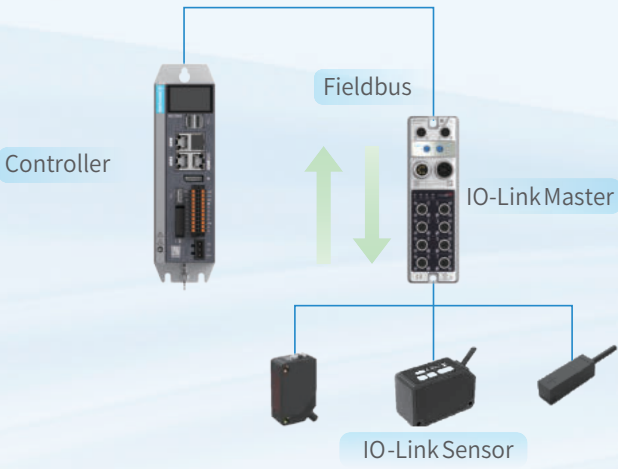

- Up to IP67, stringent standards for reliability
- Compliant with IEC-61131-2 standard
 - Ambient temperature range: -25°C ~70°C
 - Material shell adopts alloy


Category	Location	Address	Phone	Email
Germany-Stuttgart	Germany	Stuttgart	+49 (0) 7144 8990	sales.de@inovance.eu
France-Bordeaux	France	Bordeaux	+33 (0) 5594 01050	sales.fr@inovance.eu
Spain-Barcelona	Spain	Barcelona	+34 93 504 94 48	sales.es@inovance.eu
Italy-Milano	Italy	Milano	+39 (0) 2268 22318	sales.it@inovance.eu
Turkey-Istanbul	Turkey	Istanbul	+90 (216) 706 17 89	sales.tr@inovance.eu
China	China	Shenzhen	+852 2751 6080	info@inovance.com
Vietnam - Hanoi	Vietnam	Hanoi	+84 948118793	tiendinh@inovance.com
South Korea-Seoul	South Korea	Seoul	+82 (0)2 3489 8850	INOVANCEKR@inovance.eu

- Function improves easy fault tracing
- Over 20 types of diagnostic information*
 - ID recognition function for quick error
 - Real time faults visualization
- *Note: system requirements Codesys-based PLC



Copyright © Shenzhen Inovance Technology Co., Ltd.

19120524 A01

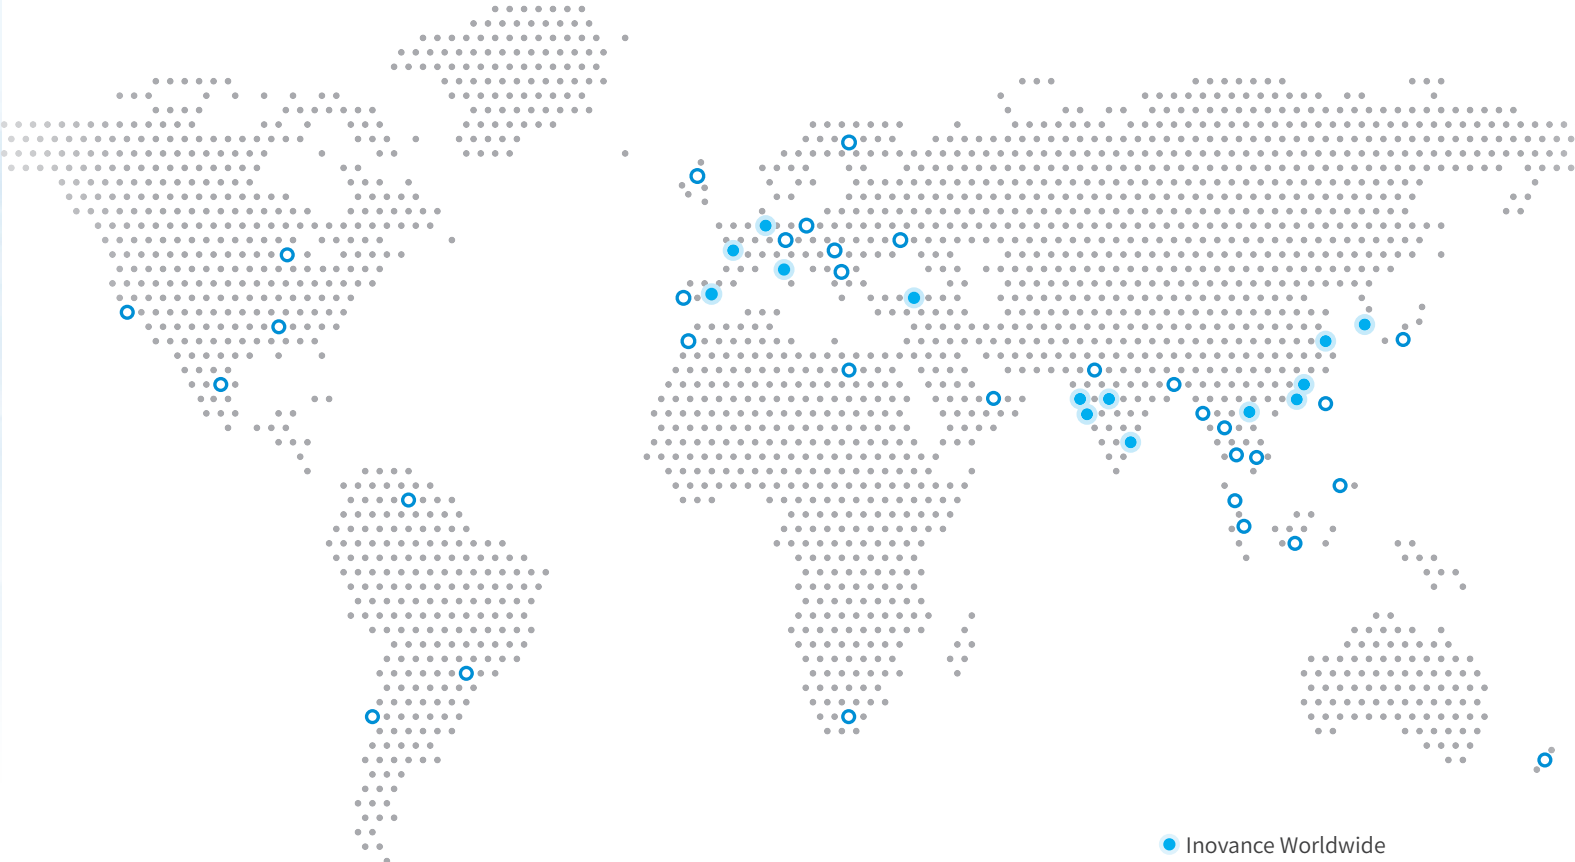

- Inovance Worldwide
- Distribution & Service Partners

Advancing industrial technology, for a better world

Europe

- Germany-Stuttgart**
+49 (0) 7144 8990
sales.de@inovance.eu
- France-Bordeaux**
+33 (0) 5594 01050
sales.fr@inovance.eu
- Spain-Barcelona**
+34 93 504 94 48
sales.es@inovance.eu
- Italy-Milano**
+39 (0) 2268 22318
sales.it@inovance.eu

Asia Pacific

- Turkey-Istanbul**
+90 (216) 706 17 89
sales.tr@inovance.eu
- India**
Chennai (Head Office) | +91 (0) 44 4380 0201
Ahmedabad | +91 794003 4272
Mumbai | +91 22 4971 5883
New Delhi | +91 11 4165 4524
Sales Network
Kolkata, Bengaluru, Pune, Coimbatore, Hyderabad, Vadodara, Jaipur
- China**
Shenzhen Inovance Technology Co., Ltd.
Suzhou Inovance Technology Co. Ltd.
4000-300124 (within China)
info@inovance.com
service@inovance.com
- Vietnam - Hanoi**
+84 948118793
tiendinh@inovance.com
- South Korea-Seoul**
+82 (0)2 3489 8850
INOVANCEKR@inovance.eu

Hong Kong SAR (International Export Office)
+852 2751 6080
info@inovance.com

FOLLOW US

Instagram YouTube LinkedIn Facebook X

INOVANCE

GS20 & GR20 Series IO-Link modules

Operation outside the cabinet, efficient wiring, designed for reliability





Features & functions


- Up to IP67, installation & operation outside the cabinet
- IO-Link communication (IEC61131-9)
- Standardized interface & flexible/stable data exchange
- Nearby installation without extra wiring




IO-Link Modules Overview

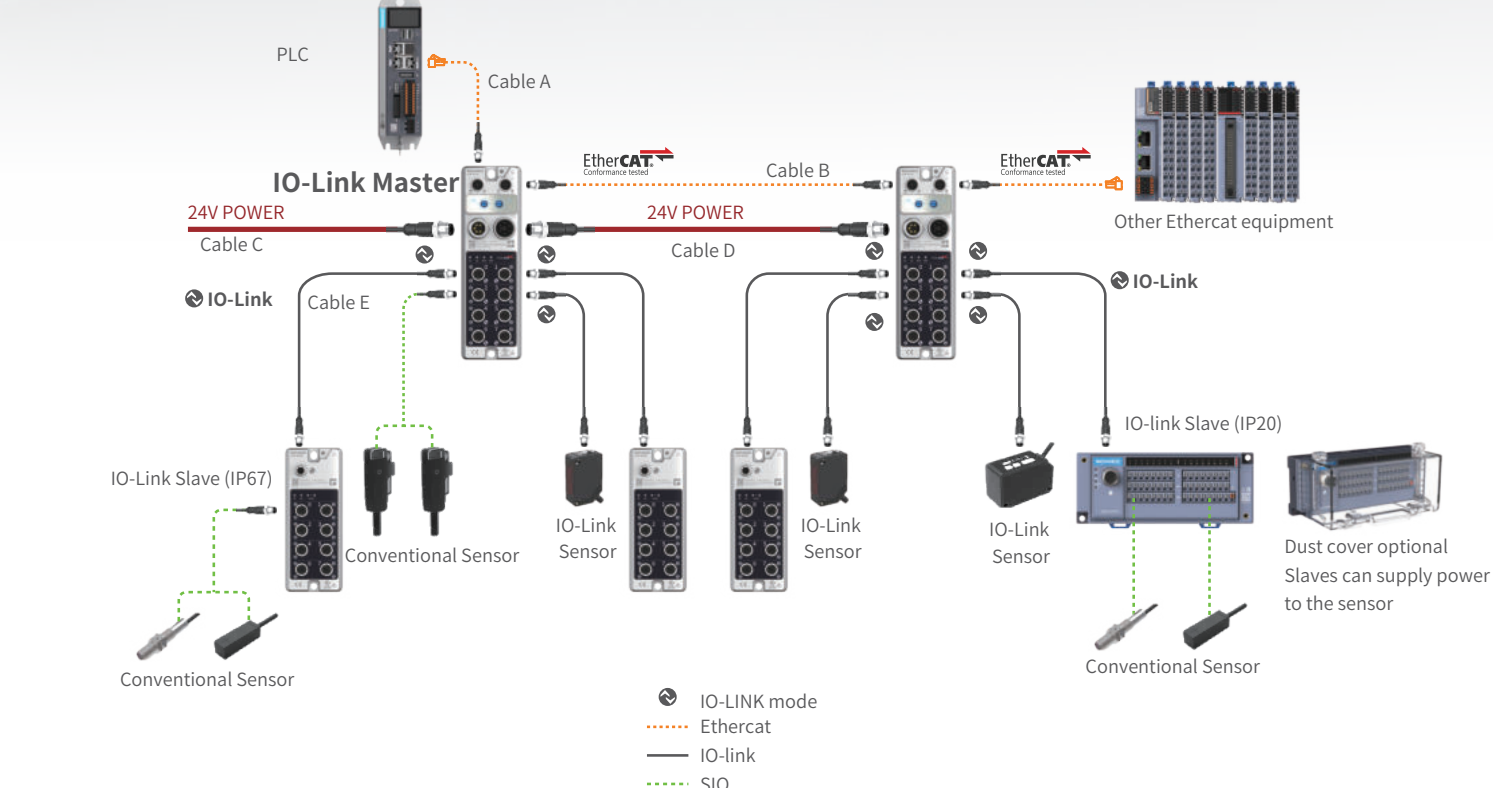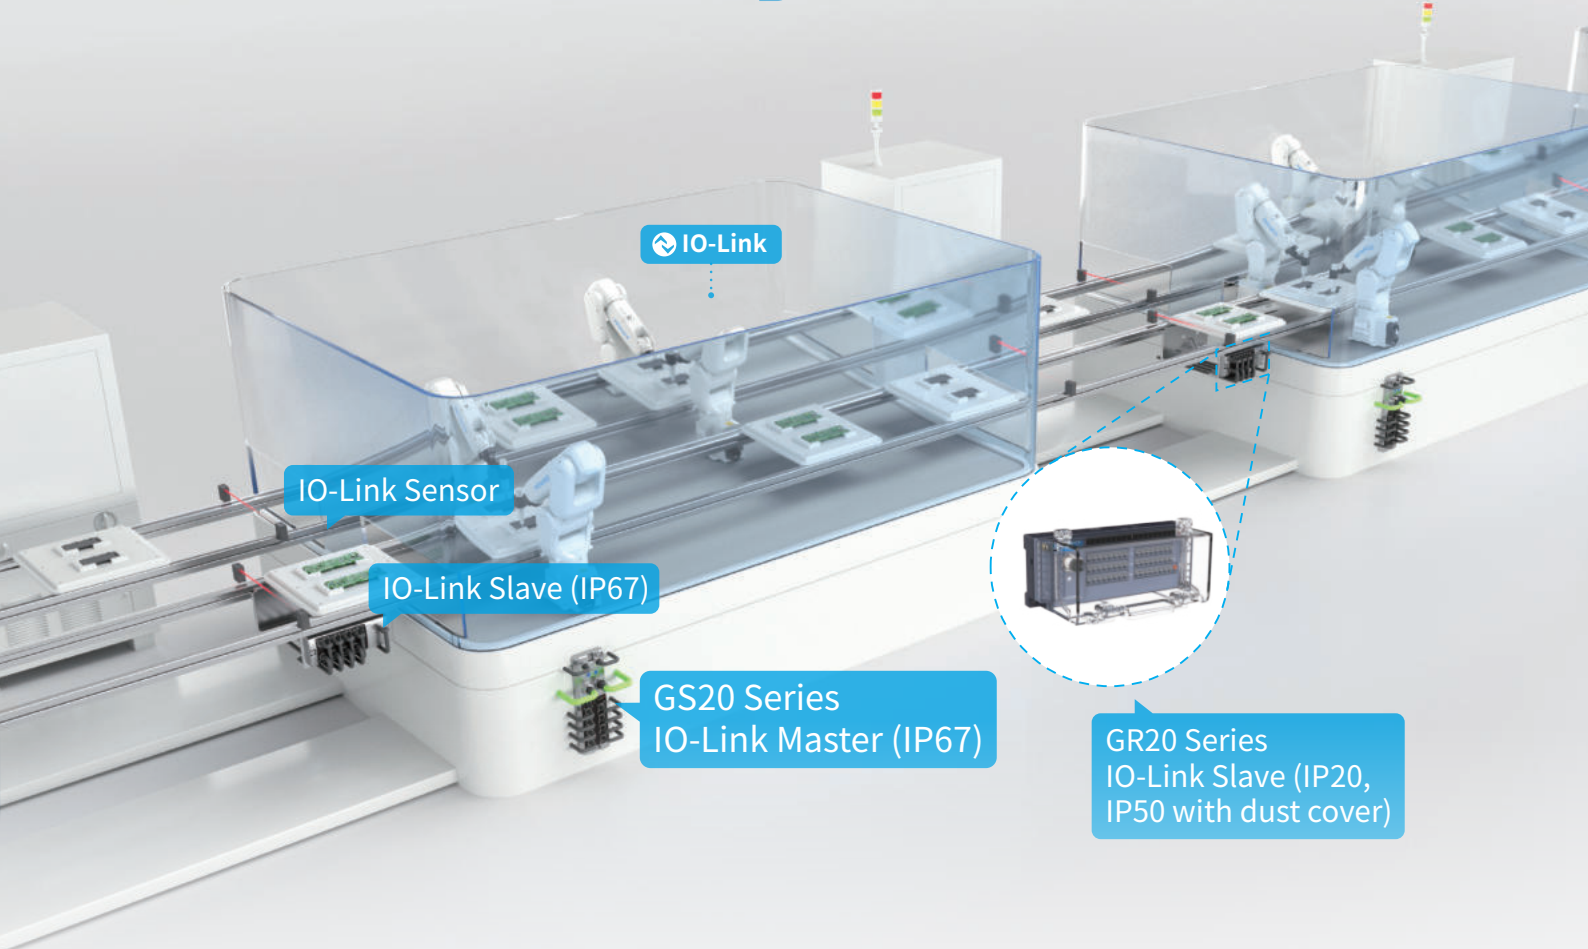


IO-Link Master GS20

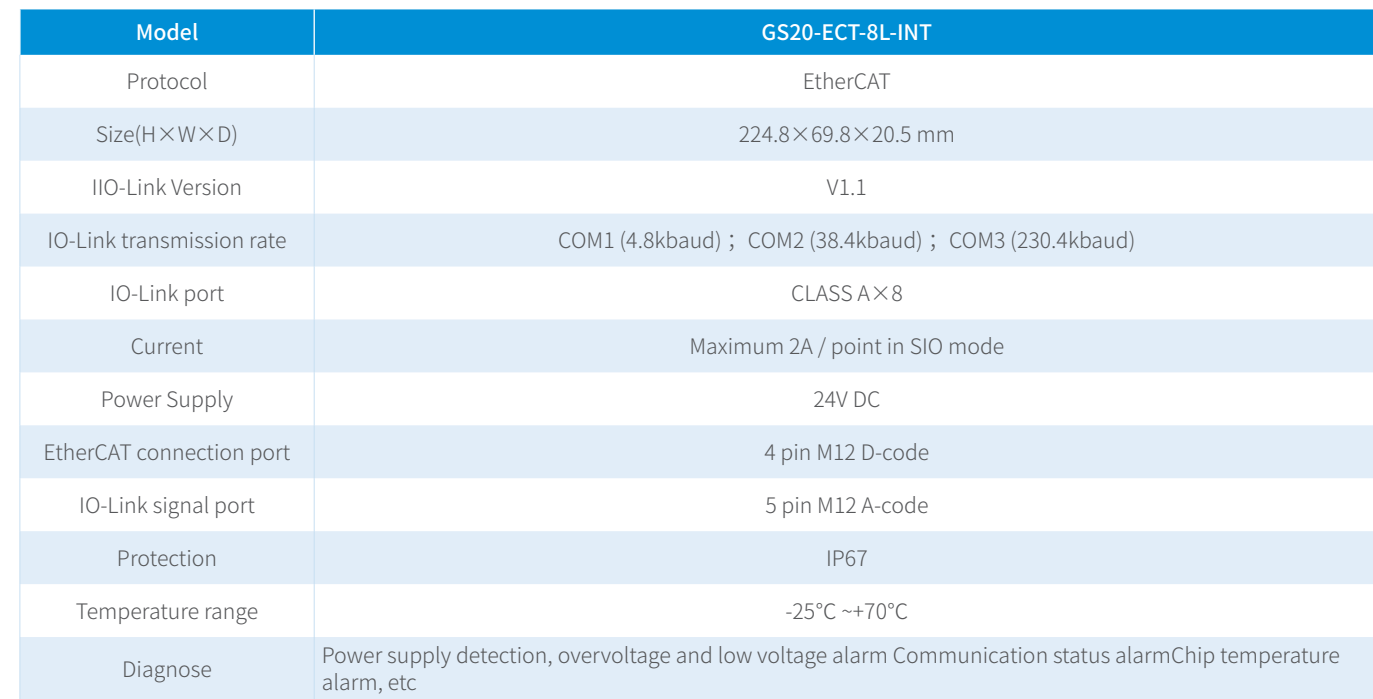

INOVANCE
G220-000000

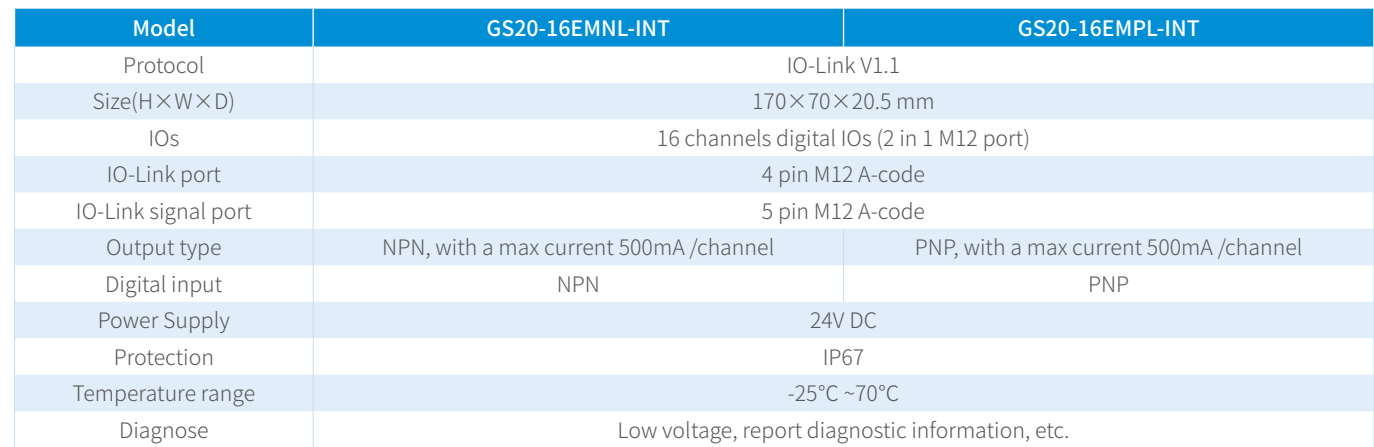


- IO-Link port

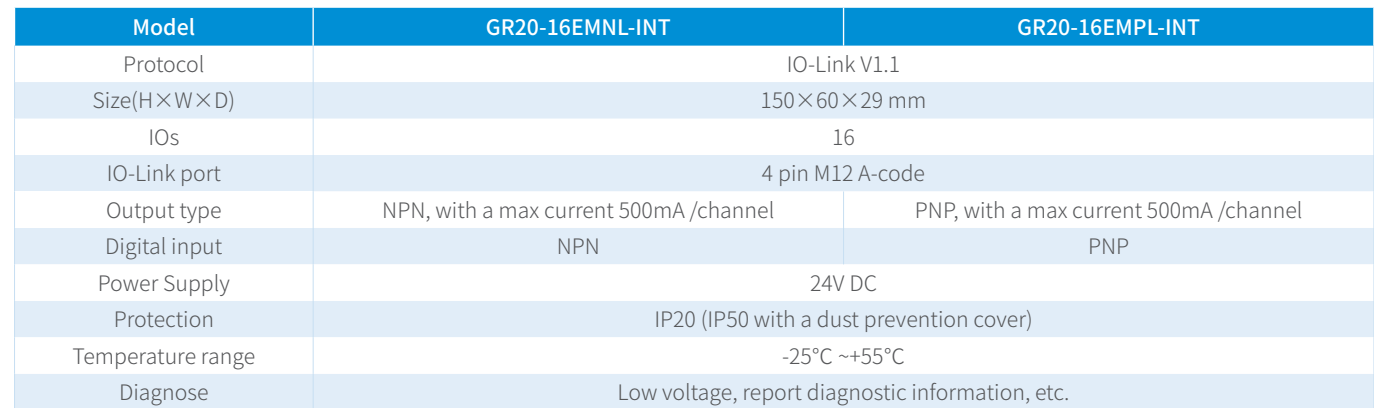

Model
CAR B145 M13DMG4.2

Model	Appearance	Description	Length (m)
CAB-RJ45-M12DMS4-3		EtherCAT cable, M12 (D-code), 1*male straight head - 1*RJ45 port, PLC network port connected to EtherCAT communication cable of the master	3
CAB-RJ45-M12DMS4-5			5
CAB-RJ45-M12DMS4-8			8
CAB-RJ45-M12DMS4-10			10
CAB-RJ45-M12DMS4-15			15
CAB-M12AMS4-M12AFL4-3		IO-Link cable, 4 pin M12(A-code), 1*male straight head - 1*female elbow, used for connecting IO-Link master to IO-Link substation	3
CAB-M12AMS4-M12AFL4-5			5
CAB-M12AMS4-M12AFL4-8			8
CAB-M12AMS4-M12AFL4-10			10
CAB-M12AMS4-M12AFL4-15			15
CAB-M12AMS4-M12AFL4-3-T-taiyo		IO-Link cable, M12 A-Code, 4 pin, 1*male straight head - 1*female elbow, With drag chain - Taiyo, used for connecting the IO-Link master to the IO-Link substation (flexible cable, bendable 3-5 million times)	3
CAB-M12AMS4-M12AFL4-5-T-taiyo			5
CAB-M12AMS4-M12AFL4-8-T-taiyo			8
CAB-M12AMS4-M12AFL4-10-T-taiyo			10
CAB-M12AMS4-M12AFL4-15-T0-taiyo			15
CAB-7/8FL5-7/8ML5-3		7/8" power supply cable, 5 pin, 1*male elbow - 1*female elbow, used for cascading of multiple IO-Link master power supplies	3
CAB-7/8FL5-7/8ML5-5			5
CAB-7/8FL5-7/8ML5-8			8
CAB-7/8FL5-7/8ML5-10			10
CAB-7/8FL5-7/8ML5-15			15
CAB-M12DMS4-M12DMS4-3		EtherCAT cable, M12 (D-code), 2*male straight head, with shielded layer, for cascading multiple IO-Link masters (EtherCAT cascaded)	3
CAB-M12DMS4-M12DMS4-5			5
CAB-M12DMS4-M12DMS4-8			8
CAB-M12DMS4-M12DMS4-10			10
CAB-M12DMS4-M12DMS4-15			15
CAB-7/8FL5-3		7/8" power supply cable, 5 pin, 1*female elbow, used to power the master	3
CAB-7/8FL5-5			5
CAB-7/8FL5-8			8
CAB-7/8FL5-10			10
CAB-7/8FL5-15			15

Model	Appearance	Description	Length (m)
CON-M12AFS4		4 pin, female straight connector, connected directly	-
CON-M12AFL4		4 pin, female elbow connector, connected directly	-
CON-M12AMS5		5 pin, male straight connector, connected directly	-
CON-M12AML5		5 pin, male elbow connector, connected directly	-
CON-M12AMS5-YF5		Y-type M12 connector, used for master class A to class B	-
GR20-FCZ series dust cover		Used with GR20 series modules, 150*75.5*70mm	-