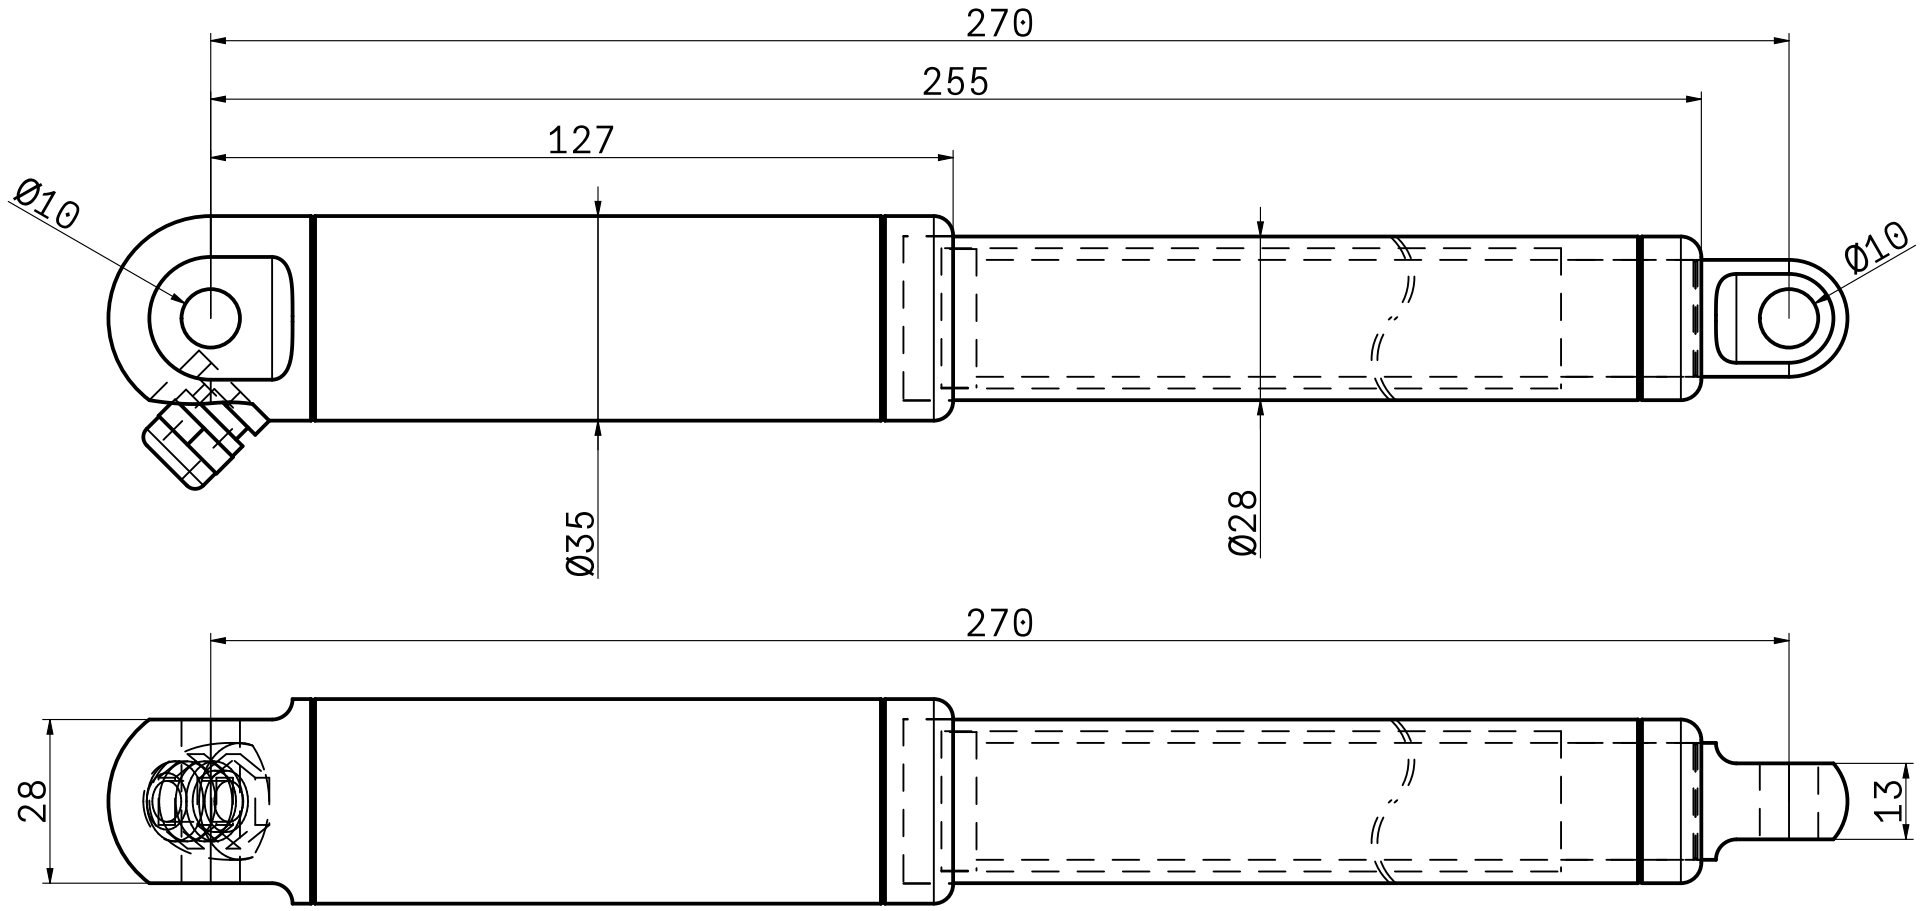


Configuration List:

Stroke length:	100 mm
Rod position:	0 mm
Noise reduction:	standard (Standard)
Gearing:	1:27-900 N (nominel)
Voltage:	24 VDC 1:27 (900N - 7.5mm/s)
Pitch:	2 mm std. (Standard)
Cable length:	9 m
Cable Type and Connector:	Black shielded cable, Molex Minifit Jr. Connector (Shielded cable is not available for EN/ES60601)
Controller/Hall:	icon SPP D
Steel/IP:	Std. steel, IP66
Brackets:	Alu
Tube color:	Black, RAL9005, shine 25 (Standard)
Ring color:	Black (Standard)
Length:	270 mm

concens
member of Bansbach group
Oddesundvej 1
DK-6715 Esbjerg N
Denmark
Phone: +4570111131
Mail: Info@concens.com
Web: www.concens.com

Concens Part No.:
350100-273297D020000

Creation Date:
10-11-2026

Sheet size:
A4

Properietary and confidential
The information contained in this drawing is the sole property of Concens A/S. Any reproduction in part or as a whole without the written permission of Concens A/S is prohibited.

Comments:
DIMENSIONS ARE IN mm,
TOLERANCE ON DIMENSIONS CAN BE FOUND ON DATASHEET. OUT-OF-SCALE TECHNICAL DRAWING.