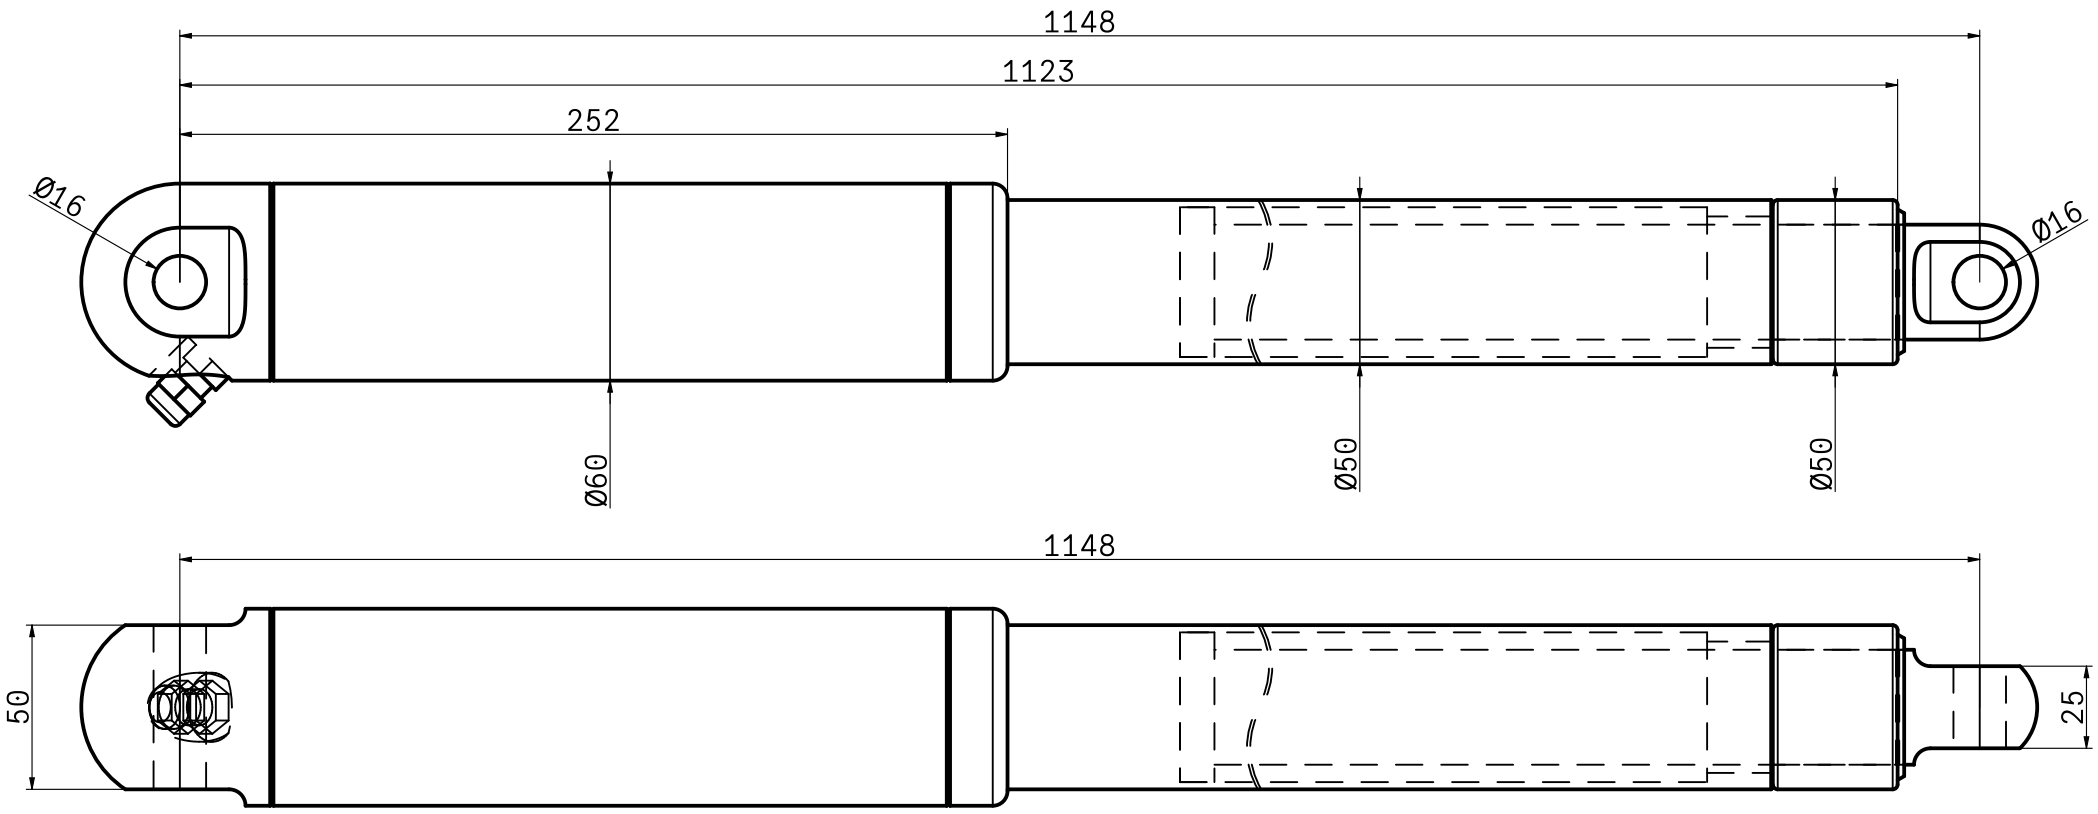


concens
member of Bansbach group
Oddesundvej 1
DK-6715 Esbjerg N
Denmark
Phone: +4570111131
Mail: Info@concens.com
Web: www.concens.com

Concens Part No.:
600750-663456+920200

Creation Date:
19-11-2026

Sheet size:
A4

Properietary and confidential
The information contained in this drawing is the sole property of Concens A/S. Any reproduction in part or as a whole without the written permission of Concens A/S is prohibited.

Comments:
DIMENSIONS ARE IN mm,
TOLERANCE ON DIMENSIONS CAN BE FOUND ON DATASHEET. OUT-OF-SCALE TECHNICAL DRAWING.

Configuration List:

Stroke length:	750 mm
Rod position:	0 mm
Noise reduction:	standard (Standard)
Gearing:	1:66-6600 N (nominel)
Voltage:	24 VDC
Pitch:	4mm std. (Standard)
Cable length:	5 m
Cable Type and Connector:	Black shielded cable, no connector (Shielded cable is not available for EN/ES60601)
Controller/Hall:	With hall sensor
Steel/IP:	Std. steel, Harsh Env.
Brackets:	Alu
Tube color:	Black, RAL9005, shine 25
Ring color:	Black std. steel (Harsh E.)
Length:	1148 mm