


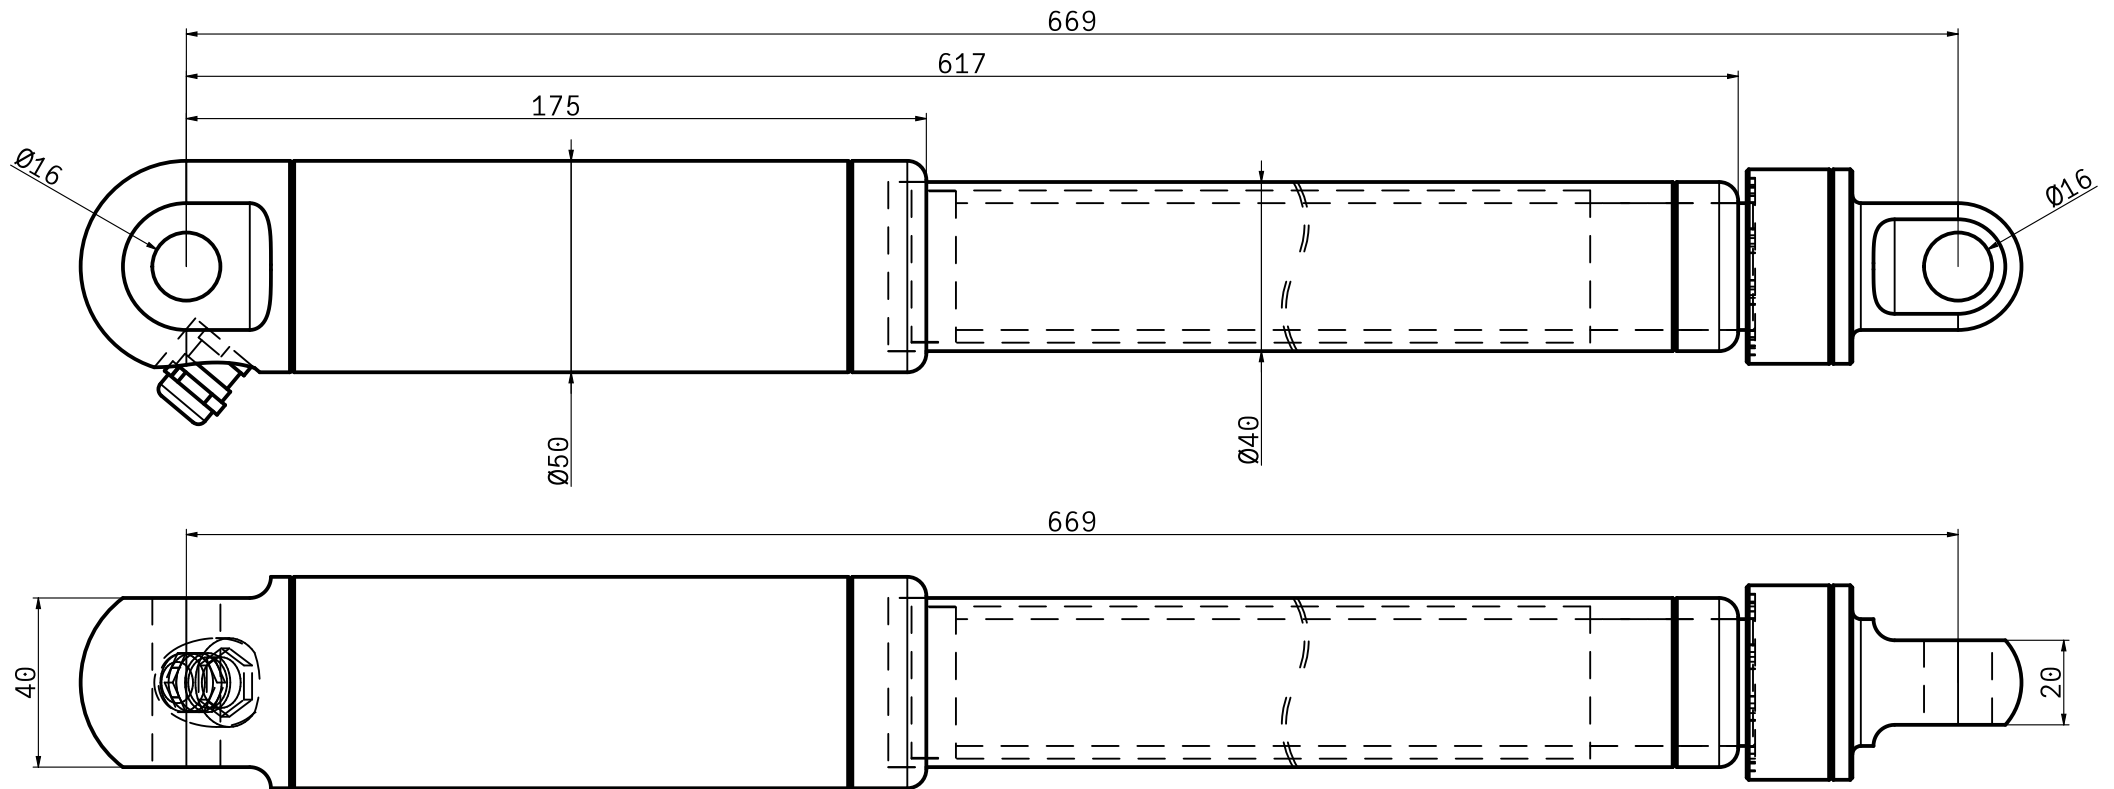

concens 
member of **Bansbach** group

Oddesundvej 1
DK-6715 Esbjerg N
Denmark

Phone: +4570111131
Mail: Info@concens.com
Web: www.concens.com

Proprietary and confidential

The information contained in this drawing is the sole property of Concens A/S. Any reproduction in part or as a whole without the written permission of Concens A/S is prohibited.

Concens Part No.:

500400-243732-020000

Creation Date:
07-08-2026

Sheet size:
A4

Comments:

DIMENSIONS ARE IN mm,
TOLERANCE ON DIMENSIONS CAN
BE FOUND ON DATASHEET. OUT-OF-
SCALE TECHNICAL DRAWING.

Configuration List:

Stroke length: 400 mm
Rod position: 0 mm
Noise reduction: standard (Standard)
Gearing: 1:24-3100 N (nominel)
Voltage: 24 VDC 1:24 (3100N - 12mm/s)
Pitch: 'Spline' and emer. low. (Extended length reduced by 5mm)
Cable length: 3 m
Cable Type and Connector: Black, Molex Minifit (Standard)
Controller/Hall: Without hall sensor (Standard)
Steel/IP: Std. steel, IP66 (Actuators with the S&EL option are not IP-rated due to the technical design of the front bracket)
Brackets: Alu
Tube color: Black, RAL9005, shine 25 (Standard)
Ring color: Black (Standard)
Length: 669 mm