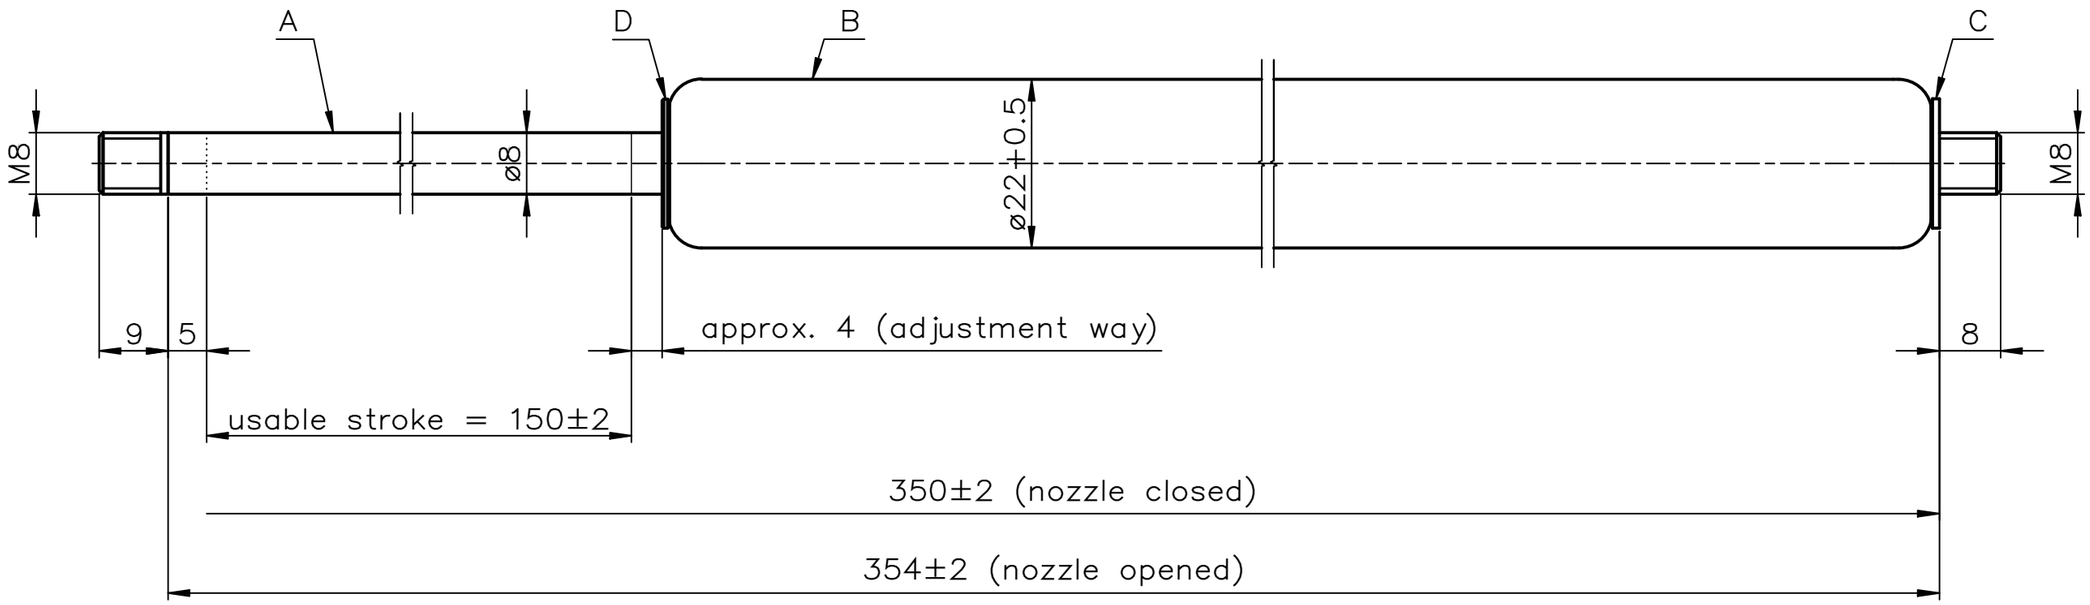

* Piston rod must be protected against paint, dirt and damage.

Force tested statically, testing speed 750mm/min

Extension force F1 = 0N

Test condition: Piston rod downwards

Surface treatment

A = CeramPro

B = black powder coated

C = zinc plated steel

D = aluminium

This drawing is not subject to the revision service.

Without our specifically acceptance, this drawing is not allowed to be copied or given to other persons.

scale: drawing not in scale

position:

Note: All dimensions in mm

	date	name
edited	05.03.2026	W.Grimm
check.	05.03.2026	M.Munz

adjustable damper ø8/22

Bansbach easylift GmbH
Barbarossastr. 8
D-73547 Lorch/Württemberg

B0N0XB1-150-350--004/000N

sheet