




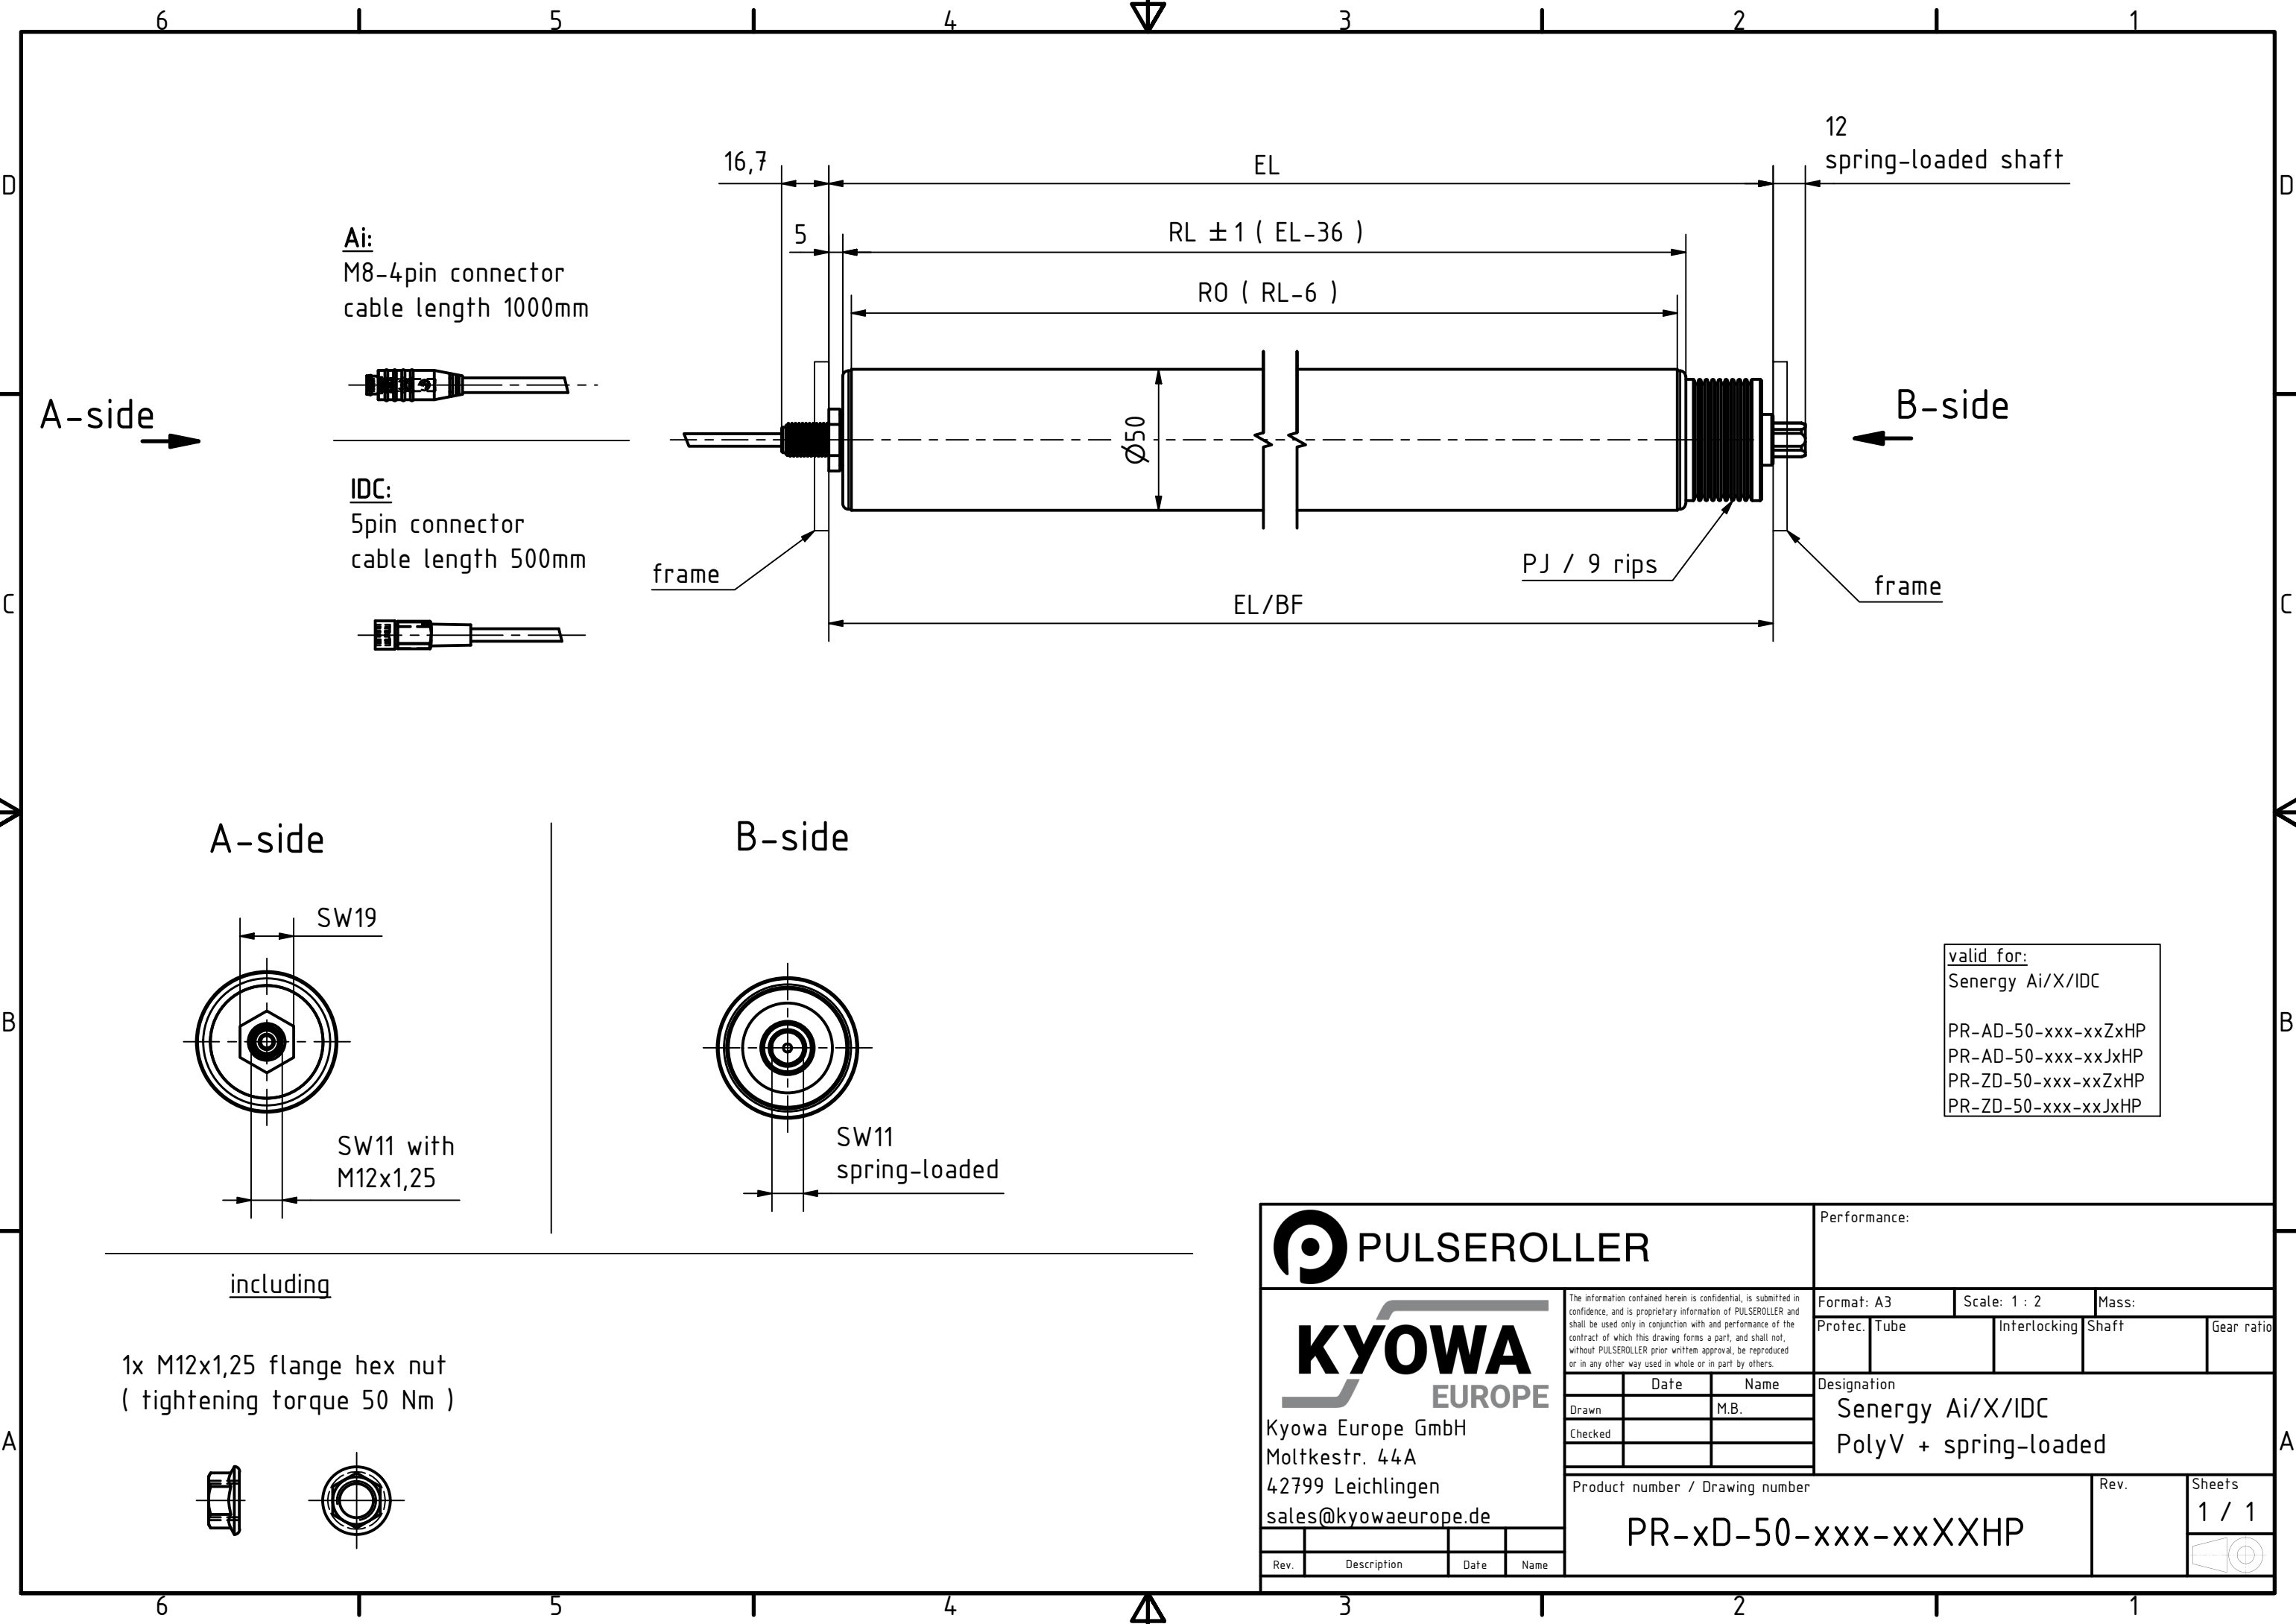


Ai:
M8-4pin connector
cable length 1000mm




IDC:
5pin connector
cable length 500mm



A-side

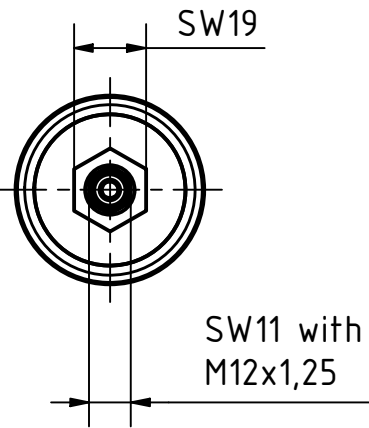

B-side

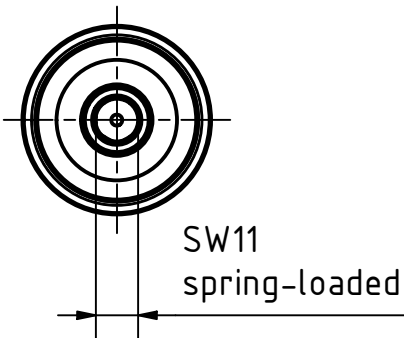

valid for:
Senergy Ai/X/IDC

PR-AD-50-xxx-xxZxHP
PR-AD-50-xxx-xxJxHP
PR-ZD-50-xxx-xxZxHP
PR-ZD-50-xxx-xxJxHP

including

1x M12x1,25 flange hex nut
(tightening torque 50 Nm)



Kyowa Europe GmbH
Moltkestr. 44A
42799 Leichlingen
sales@kyowaeurope.de

Rev.	Description	Date	Name
------	-------------	------	------

The information contained herein is confidential, is submitted in confidence, and is proprietary information of PULSEROLLER and shall be used only in conjunction with and performance of the contract of which this drawing forms a part, and shall not, without PULSEROLLER prior written approval, be reproduced or in any other way used in whole or in part by others.

Date	Name
Drawn	M.B.
Checked	

Product number / Drawing number
PR-xD-50-xxx-xxXXHP

Performance:				
Format: A3		Scale: 1 : 2		Mass:
Protoc.	Tube	Interlocking	Shaft	Gear ratio
Designation				
Senergy Ai/X/IDC				
PolyV + spring-loaded				
xxx-xxXXHP			Rev.	Sheets
				1 / 1
				