


Conveylinx Ai Motorcontroller



Dimensions

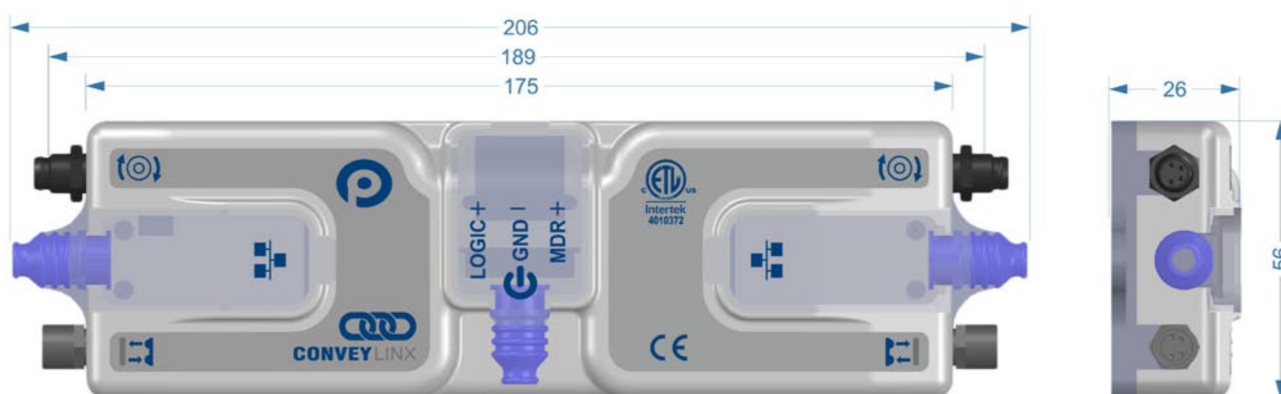

BENEFITS

Very small footprint

Excellent integration

Accelleration and deceleration setting

PROFINET IO, Ethernet I/P, Modbus/TCP Connectivity

TECHNICAL DATA

Input voltage	24.0V +/- 10%
Rated Motor output current	>3A
Available Starting Current	Up to 8.0A for 1.5s
Ambient operating temp.	0°C to 40°C
Ambient operating Humidity	5% - 95%RH (no condensation)
Ambient storage temp.	-40°C to 85°C
Ambient storage humidity	10 - 90%RH (no condensation)
Enclosure IP rating	IP54

FEATURES

Motor controller for Senergy Ai and PGDAi

2 Zones control (up to 4sensors and **2 motors**)

Easy Roll Software for changing default configuration and customization.

Motor error detection

Status LED

UL recognized | CE | **IP54**